


# DC Axial Fan

## AT4007L Series

40x40x7mm



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM) (CFM)	Static Pressure (mm-H2O) (inch-H2O)	Acoustic Noise (dBA)
AT4007L-05L1B	5	4.5~5.5	0.12	0.60	5000	0.156 5.52	1.88 0.074	25.3
AT4007L-05M1B	5	4.5~5.5	0.17	0.85	6000	0.180 6.36	2.22 0.087	30.9
AT4007L-05H1B	5	4.5~5.5	0.24	1.20	7000	0.189 6.66	2.59 0.102	33.6
AT4007L-12L1B	12	10.8~13.8	0.07	0.84	5000	0.156 5.52	1.88 0.074	25.3
AT4007L-12M1B	12	9~13.8	0.08	0.96	6000	0.180 6.36	2.22 0.087	30.9
AT4007L-12H1B	12	9~13.8	0.12	1.44	7000	0.189 6.66	2.59 0.102	33.6

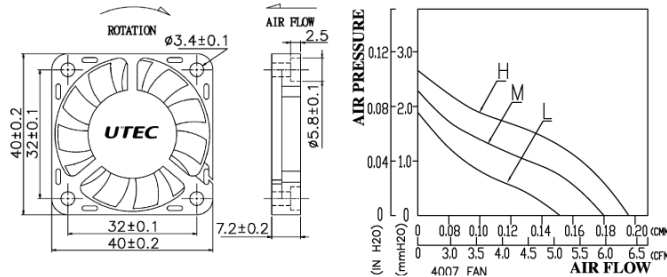

## DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV