



DC Axial Fan

AT7015L Series

70x70x15mm II



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM) (CFM)		Static Pressure (mm-H2O) (Inch-H2O)		Acoustic Noise (dBA)
AT7015L-12LS/2B/1B/FB	12	6~13.8	0.07	0.84	2600	0.485	17.11	1.50	0.059	27.5
AT7015L-12MS/2B/1B/FB	12	6~13.8	0.09	1.08	3200	0.617	21.79	2.16	0.085	32.4
AT7015L-12HS/2B/1B/FB	12	6~13.8	0.12	1.44	3800	0.761	26.87	2.98	0.117	37.2
AT7015L-12HHS/2B/1B/FB	12	6~13.8	0.20	2.40	4400	0.878	31.02	3.83	0.151	40.7
AT7015L-24LS/2B/1B/FB	24	12~27.6	0.06	1.44	2600	0.485	17.11	1.50	0.059	27.5
AT7015L-24MS/2B/1B/FB	24	12~27.6	0.08	1.92	3200	0.617	21.79	2.16	0.085	32.4
AT7015L-24HS/2B/1B/FB	24	12~27.6	0.09	2.16	3800	0.761	26.87	2.98	0.117	37.2
AT7015L-24HHS/2B/1B/FB	24	12~27.6	0.10	2.40	4400	0.878	31.02	3.83	0.151	40.7

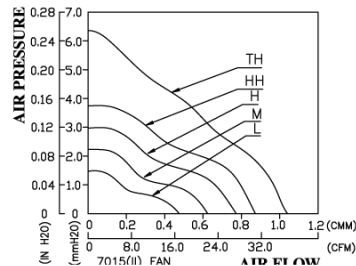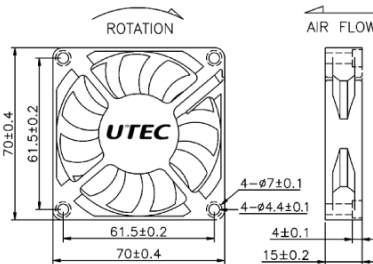

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV