



DC Blower Fan

ATB6015L Series

60x60x15.2mm II



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow		Static Pressure		Acoustic Noise (dBA)
						(CMM)	(CFM)	(mm-H2O)	(inch-H2O)	
ATB6015L-12L2B	12	9~13.8	0.05	0.60	2500	0.087	3.09	4.43	0.174	22.7
ATB6015L-12M2B	12	6~13.8	0.08	0.96	3000	0.104	3.69	6.72	0.265	25.6
ATB6015L-12H2B	12	6~13.8	0.10	1.20	3500	0.124	4.38	9.76	0.384	29.9
ATB6015L-12HH2B	12	6~13.8	0.12	1.44	4000	0.135	4.77	13.60	0.535	33.3
ATB6015L-12TH2B	12	6~13.8	0.18	2.16	4500	0.155	5.47	17.90	0.705	36.9
ATB6015L-12FH2B	12	6~13.8	0.27	3.24	5000	0.170	6.02	23.30	0.917	40.1
ATB6015L-12VH2B	12	6~13.8	0.23	2.76	5500	0.193	6.83	27.00	1.063	41.9

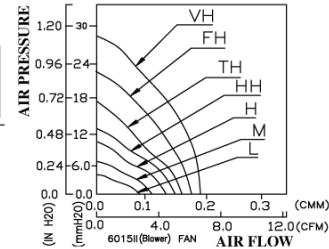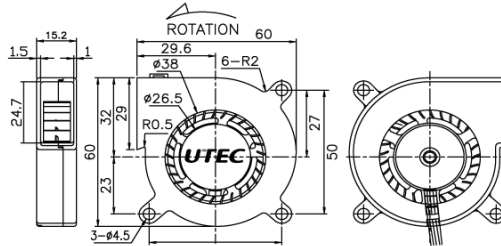

DC Fan

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV