


DC Diagonal Fan

AT6010L Series

60x60x11mm



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM) (CFM)	Static Pressure (mm-H ₂ O) (inch-H ₂ O)	Acoustic Noise (dBA)
AT6010L-05LS/2B/1B/FB □□X	5	4.5~5.5	0.17	0.85	3000	0.117 4.12	4.09 0.161	28.2
AT6010L-05MS/2B/1B/FB □□X	5	4~5.5	0.27	1.35	3600	0.136 4.79	5.73 0.226	32.9
AT6010L-12LS/2B/1B/FB □□X	12	9~13.8	0.06	0.72	3000	0.117 4.12	4.09 0.161	28.2
AT6010L-12MS/2B/1B/FB □□X	12	6~13.8	0.10	1.20	3600	0.136 4.79	5.73 0.226	32.9
AT6010L-12HS/2B/1B/FB □□X	12	6~13.8	0.20	2.40	4200	0.158 5.57	7.92 0.312	37.4
AT6010L-12HH2B/1B □□X	12	6~13.8	0.20	2.40	4500	0.163 5.76	9.11 0.358	39.3

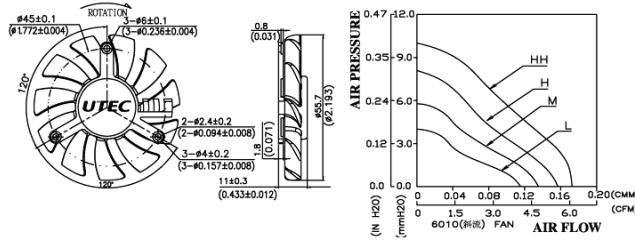

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV