


TYPICAL PROPERTIES OF TSP-FI 2010

Properties	Value	Test Method
Thickness (mm)	0.3 ~ 2.0	ASTM D 374
Color	White/ Blue/ Gray/ Pink	Visual
Hardness (Shore 00)	20 ~ 60	ASTM D 2240
Specific Gravity (g/cm ³)	2.1	ASTM D 792
Continue Use (°C)	- 60 ~ 150	-
Dielectric Breakdown (kV)	6	ASTM D 149
Volume Resistivity (Ωcm)	1 x 10 ¹³	ASTM D 257
Thermal Conductivity (W/mK)	1.0	ASTM 5470
Thermal Resistance (m ² k/W)	6.0*10 ⁻³	ASTM D 150
Flame Retardant level	V-0	UL 94



| Thermal Resistance |

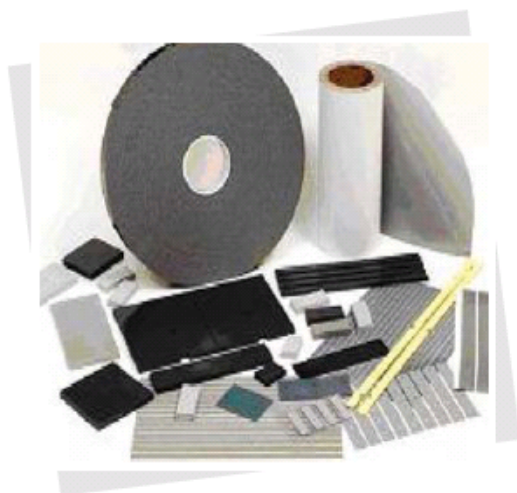