


TYPICAL PROPERTIES OF TSP-FI 7030

Properties	Value	Test Method
Thickness (mm)	0.5 ~ 2.0	ASTM D 374
Color	White/ Blue/ Gray/ Pink	Visual
Hardness (Shore 00)	50 ~ 80	ASTM D 2240
Specific Gravity (g/cm ³)	3.0	ASTM D 792
Continue Use (°C)	- 60 ~ 150	-
Dielectric Breakdown (kV)	6	ASTM D 149
Volume Resistivity (Ωcm)	1 x 10 ¹³	ASTM D 257
Thermal Conductivity (W/mK)	3.0	ASTM 5470
Thermal Resistance (m ² k/W)	2.4*10 ⁻³	ASTM D 150
Flame Retardant level	V-0	UL 94



Thermal Resistance I

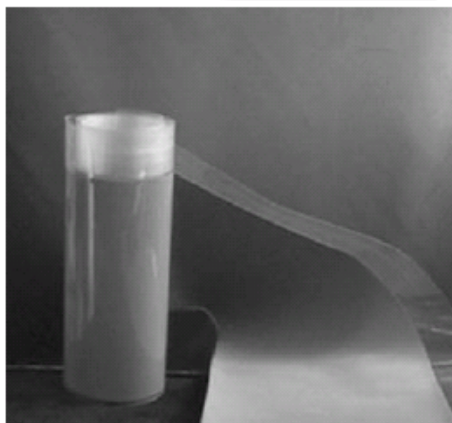