


# TSP-Fi 7020

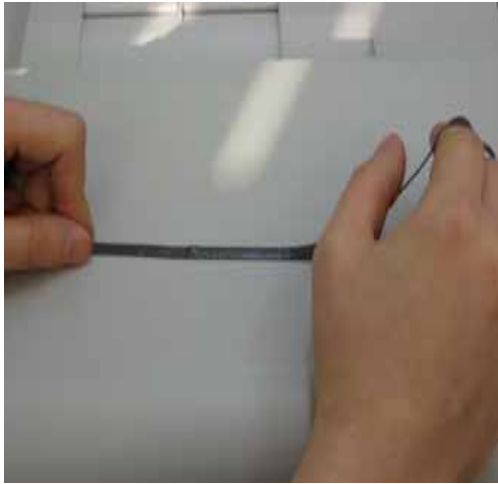

\* Typical property of TSP-Fi 6020.

Properties	Value	Test Method
Thickness (mm)	0.3 ~ 2.0	ASTM D 374
Color	White/ Blue/ Gray/ Pink	Visual
Hardness (Shore 00)	60~80	ASTM D 2240
Specific Gravity (g/cm <sup>3</sup> )	2.7	ASTM D 792
Continue Use (°C)	- 60 ~ 150	-
Dielectric Breakdown (kV)	6	ASTM D 149
Volume Resistivity (Ω·cm)	1 × 10 <sup>13</sup>	ASTM D 257
Thermal Conductivity (W/mK)	2.0	ASTM 5470
Thermal Resistance(m <sup>2</sup> k/W)	3.8*10 <sup>-3</sup>	ASTM D 150
Flame Retardant level	V-0	UL 94

Thermal Resistance

