


TSP-Fi 8030

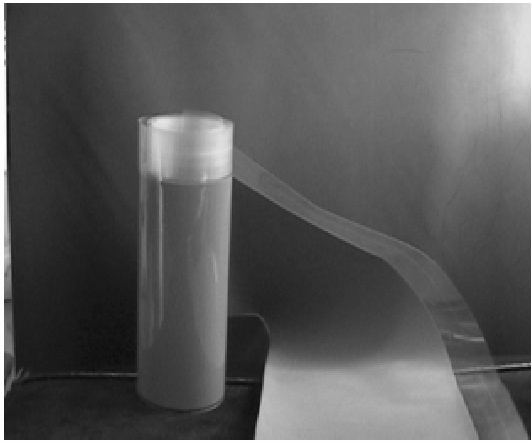

* Typical property of TSP-Fi 7025.

Properties	Value	Test Method
Thickness (mm)	0.5 ~ 2.0	ASTM D 374
Color	White/ Blue/ Gray/ Pink	Visual
Hardness (Shore 00)	70~85	ASTM D 2240
Specific Gravity (g/cm ³)	3.0	ASTM D 792
Continue Use (°C)	- 60 ~ 150	-
Dielectric Breakdown (kV)	6	ASTM D 149
Volume Resistivity (Ω·cm)	1 × 10 ¹³	ASTM D 257
Thermal Conductivity (W/mK)	3.0	ASTM 5470
Thermal Resistance(m ² k/W)	2.4*10 ⁻³	ASTM D 150
Flame Retardant level	V-0	UL 94

Thermal Resistance

