


# TYPICAL PROPERTIES OF TC 5015

Properties	Value	Test Method
Thickness (mm)	0.3 ~ 20.0	ASTM D 374
Color	White/ Blue/ Gray/ Pink	Visual
Hardness (Shore 00)	50	ASTM D 2240
Specific Gravity (g/cm <sup>3</sup> )	2.4	ASTM D 792
Continue Use (°C)	- 60 ~ 150	-
Dielectric Breakdown (kV)	7	ASTM D 149
Volume Resistivity (Ωcm)	1 x 10 <sup>13</sup>	ASTM D 257
Thermal Conductivity (W/mK)	1.5	ASTM 5470
Flame Retardant level	V-0	UL 94

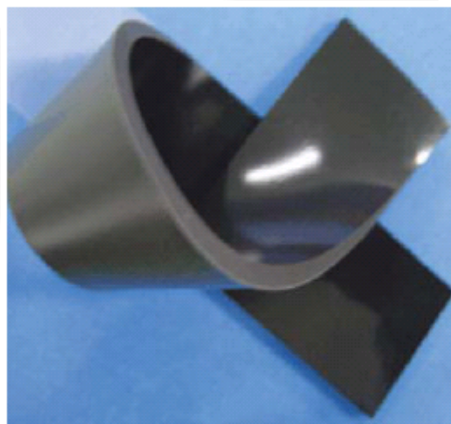

TC - 50 15

15 = Thermal conductivity(1.5W/mK)

50 = Hardness (Shore A)

TC = Thermal Conductivity rubber