


# DC Axial Fan

## AT8015L Series

80x80x15.3mm II



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow		Static Pressure		Acoustic Noise (dBA)
						(CMM)	(CFM)	(mm-H2O)	(Inch-H2O)	
AT8015L-12LS/2B/1B/FB (-)	12	6~13.8	0.10	1.20	2000	0.836	29.54	1.73	0.068	25.4
AT8015L-12MS/2B/1B/FB (-)	12	6~13.8	0.19	2.28	2500	1.049	37.04	2.68	0.106	32.2
AT8015L-12HS/2B/1B/FB (-)	12	6~13.8	0.26	3.12	3000	1.201	42.42	3.93	0.155	36.1
AT8015L-12HHS/2B/1B/FB (-)	12	6~13.8	0.43	5.16	3300	1.324	46.75	4.95	0.195	41.1
AT8015L-24LS/2B/1B/FB (-)	24	12~27.6	0.10	2.40	2000	0.836	29.54	1.73	0.068	25.4
AT8015L-24MS/2B/1B/FB (-)	24	12~27.6	0.12	2.88	2500	1.070	37.80	2.75	0.108	32.2
AT8015L-24HS/2B/1B/FB (-)	24	12~27.6	0.15	3.60	3000	1.201	42.42	3.93	0.155	36.1
AT8015L-24HHS/2B/1B/FB (-)	24	12~27.6	0.26	6.24	3300	1.324	46.75	4.95	0.195	41.1

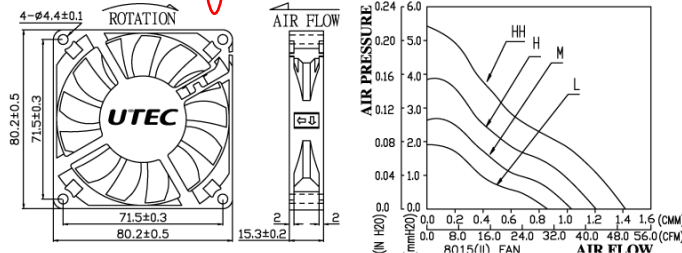

## DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV