
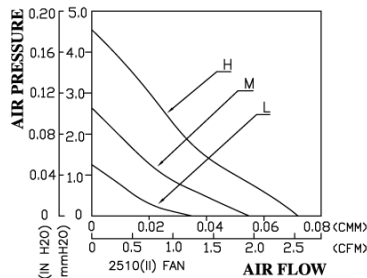



DC Axial Fan

AT2510L Series

25x25x10mm II



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM)	(CFM)	Static Pressure (mm-H2O)	(inch-H2O)	Acoustic Noise (dBA)
AT2510L-03LS/2B/1B/FB	3.3	3~3.6	0.14	0.46	7000	0.039	1.38	1.50	0.059	21.0
AT2510L-03MS/2B/1B/FB	3.3	3~3.6	0.23	0.76	10000	0.061	2.14	3.47	0.137	25.5
AT2510L-03H2B/1B	3.3	3~3.6	0.29	0.96	13000	0.081	2.85	5.63	0.222	31.5
AT2510L-05LS/2B/1B/FB	5	4~5.5	0.09	0.45	7000	0.039	1.38	1.50	0.059	21.0
AT2510L-05MS/2B/1B/FB	5	4~5.5	0.16	0.80	10000	0.061	2.14	3.47	0.137	25.5
AT2510L-05H2B/1B	5	4~5.5	0.20	1.00	13000	0.081	2.85	5.63	0.222	31.5
AT2510L-12LS/2B/1B/FB	12	10.8~13.8	0.05	0.60	7000	0.039	1.38	1.50	0.059	21.0
AT2510L-12MS/2B/1B/FB	12	9~13.8	0.07	0.84	10000	0.061	2.14	3.47	0.137	25.5
AT2510L-12H2B/1B	12	6~13.8	0.10	1.20	13000	0.081	2.85	5.63	0.222	31.5

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV