


DC Axial Fan

AT4010L Series

40x40x10mm I



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM) (CFM)	Static Pressure (mm-H ₂ O) (inch-H ₂ O)	Acoustic Noise (dBA)
AT4010L-03LS/2B/1B/FB	3.3	3~3.6	0.09	0.30	4000	0.130 4.58	1.03 0.041	21.0
AT4010L-03MS/2B/1B/FB	3.3	3~3.6	0.17	0.56	5000	0.158 5.57	1.59 0.063	25.3
AT4010L-03HS/2B/1B/FB	3.3	3~3.6	0.24	0.79	6000	0.205 7.24	2.02 0.079	29.7
AT4010L-05LS/2B/1B/FB	5	4.5~5.5	0.09	0.45	4000	0.130 4.58	1.03 0.041	21.0
AT4010L-05MS/2B/1B/FB	5	4.5~5.5	0.11	0.55	5000	0.158 5.57	1.59 0.063	25.3
AT4010L-05HS/2B/1B/FB	5	4.5~5.5	0.15	0.75	6000	0.205 7.24	2.02 0.079	29.7
AT4010L-12LS/2B/1B/FB	12	10.8~13.8	0.06	0.72	4000	0.130 4.58	1.03 0.041	21.0
AT4010L-12MS/2B/1B/FB	12	9~13.8	0.07	0.84	5000	0.158 5.57	1.59 0.063	25.3
AT4010L-12HS/2B/1B/FB	12	9~13.8	0.09	1.08	6000	0.205 7.24	2.02 0.079	29.7
AT4010L-12HHS/2B/1B/FB	12	9~13.8	0.10	1.20	7000	0.252 8.90	2.95 0.116	33.8
AT4010L-24MS/2B/1B/FB	24	20~27.6	0.05	1.20	5000	0.158 5.57	1.59 0.063	25.3
AT4010L-24HS/2B/1B/FB	24	20~27.6	0.09	2.16	6000	0.205 7.24	2.02 0.079	29.7

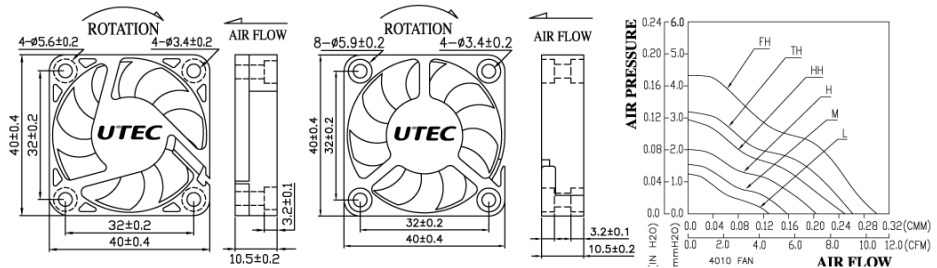

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV