



# DC Axial Fan

## AT4010L Series

40x40x10mm II



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow		Static Pressure		Acoustic Noise (dBA)
						(CMM)	(CFM)	(mm-H2O)	(inch-H2O)	
AT4010L-05LS/2B/1B/FB	5.0	4.5~6	0.09	0.45	4000	0.153	5.39	1.42	0.056	20.7
AT4010L-05MS/2B/1B/FB	5.0	4.5~6	0.13	0.65	5000	0.204	7.21	2.10	0.083	23.8
AT4010L-05HS/2B/1B/FB	5.0	4.5~6	0.22	1.10	6000	0.241	8.50	3.12	0.123	28.0
AT4010L-12LS/2B/1B/FB	12	9~13.8	0.06	0.72	4000	0.153	5.39	1.42	0.056	20.7
AT4010L-12MS/2B/1B/FB	12	6~13.8	0.09	1.08	5000	0.204	7.21	2.10	0.083	23.8
AT4010L-12HS/2B/1B/FB	12	6~13.8	0.13	1.56	6000	0.241	8.50	3.12	0.123	28.0

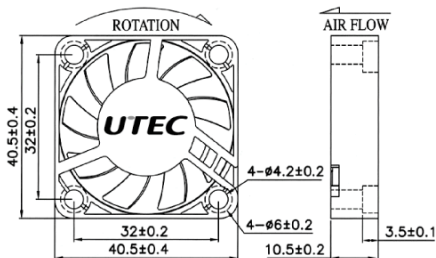

## DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV