



DC Axial Fan

AT6010L Series

60x60x10mm I



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM)	AirFlow (CFM)	Static Pressure (mm-H ₂ O)	Static Pressure (inch-H ₂ O)	Acoustic Noise (dBA)
AT6010L-05LS/2B/1B/FB	5	4.5~5.5	0.11	0.55	2800	0.345	12.18	1.26	0.049	23.4
AT6010L-05MS/2B/1B/FB	5	4.5~5.5	0.15	0.75	3400	0.389	13.75	1.84	0.073	26.3
AT6010L-12LS/2B/1B/FB	12	10.8~13.8	0.07	0.84	2800	0.345	12.18	1.26	0.049	23.4
AT6010L-12MS/2B/1B/FB	12	9~13.8	0.09	1.08	3400	0.389	13.75	1.84	0.073	26.3
AT6010L-12HS/2B/1B/FB	12	9~13.8	0.16	1.92	4000	0.466	16.47	2.48	0.098	30.1
AT6010L-12HHS/2B/1B/FB	12	9~13.8	0.24	2.88	4600	0.538	19.01	3.16	0.125	34.1
AT6010L-24LS/2B/1B/FB	24	20~27.6	0.05	1.20	2800	0.345	12.18	1.26	0.049	23.4
AT6010L-24MS/2B/1B/FB	24	20~27.6	0.06	1.44	3400	0.389	13.75	1.84	0.073	26.3
AT6010L-24HS/2B/1B/FB	24	20~27.6	0.09	2.16	4000	0.466	16.47	2.48	0.098	30.1

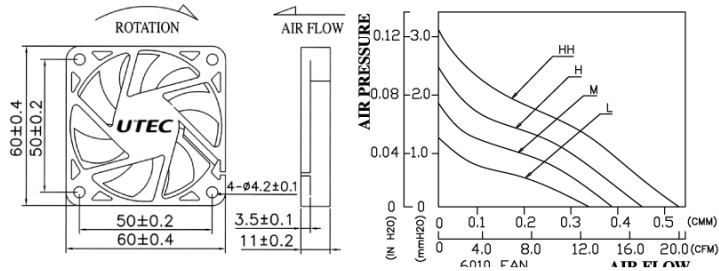

DC Fan

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
 - Bearing: Dual Ball Bearing
 - Basic Locked Roter and Polarity Protected
 - Safety Standards: UL/CUL, TUV
- (Triple and Fourfold High Speed: Approval Pending)