


DC Axial Fan

AT6010L Series

60x60x10mm II



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM) (CFM)	Static Pressure (mm-H ₂ O) (inch-H ₂ O)	Acoustic Noise (dBA)
AT6010L-05LS/2B/1B/FB	5	4~5.5	0.12	0.60	3000	0.347 12.25	1.50 0.059	27.2
AT6010L-05MS/2B/1B/FB	5	4~5.5	0.21	1.05	3600	0.398 14.04	2.18 0.086	32.2
AT6010L-12TLS/2B/1B/FB	12	10.8~13.8	0.02	0.24	1800	0.216 7.62	0.55 0.021	15.3
AT6010L-12LLS/2B/1B/FB	12	10.8~13.8	0.05	0.60	2400	0.288 10.16	0.97 0.038	21.6
AT6010L-12LS/2B/1B/FB	12	8~13.8	0.08	0.96	3000	0.347 12.25	1.50 0.059	27.2
AT6010L-12MS/2B/1B/FB	12	6~13.8	0.12	1.44	3600	0.398 14.04	2.18 0.086	32.2
AT6010L-12HS/2B/1B/FB	12	6~13.8	0.17	2.04	4200	0.475 16.78	3.01 0.118	36.7
AT6010L-12HHS/2B/1B/FB	12	6~13.8	0.25	3.00	4800	0.535 18.90	3.97 0.156	40.4
AT6010L-24LS/2B/1B/FB	24	18~27.6	0.07	1.68	3000	0.347 12.25	1.50 0.059	27.2
AT6010L-24MS/2B/1B/FB	24	12~27.6	0.09	2.16	3600	0.398 14.04	2.18 0.086	32.2
AT6010L-24HS/2B/1B/FB	24	12~27.6	0.12	2.88	4200	0.475 16.78	3.01 0.118	36.7

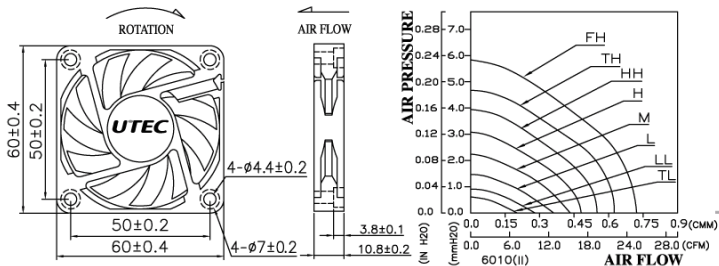

DC Fan

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV