


# DC Axial Fan

## AT6015L Series

60x60x15mm I



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM)	(CFM)	Static Pressure (mm-H <sub>2</sub> O)	(inch-H <sub>2</sub> O)	Acoustic Noise (dBA)
AT6015L-05LS/2B/1B/FB	5	4~5.5	0.12	0.60	3000	0.435	15.38	2.21	0.087	24.8
AT6015L-05MS/2B/1B/FB	5	4~5.5	0.26	1.30	3800	0.569	20.08	3.67	0.144	30.7
AT6015L-05HS/2B/1B/FB-	5	4~5.5	0.36	1.80	4600	0.688	24.31	5.05	0.199	36.1
AT6015L-12LS/2B/1B/FB	12	6~13.8	0.06	0.72	3000	0.435	15.38	2.21	0.087	24.8
AT6015L-12MS/2B/1B/FB	12	6~13.8	0.12	1.44	3800	0.569	20.08	3.67	0.144	30.7
AT6015L-12HS/2B/1B/FB	12	6~13.8	0.18	2.16	4600	0.688	24.31	5.05	0.199	36.1
AT6015L-12HHS/2B/1B/FB-	12	6~13.8	0.24	2.88	5400	0.830	29.32	7.17	0.282	40.3
AT6015L-24LS/2B/1B/FB	24	12~27.6	0.05	1.20	3000	0.435	15.38	2.21	0.087	24.8
AT6015L-24MS/2B/1B/FB	24	12~27.6	0.08	1.92	3800	0.569	20.08	3.67	0.144	30.7
AT6015L-24HS/2B/1B/FB	24	12~27.6	0.11	2.64	4600	0.688	24.31	5.05	0.199	36.1
AT6015L-24HHS/2B/1B/FB-	24	12~27.6	0.16	3.84	5400	0.830	29.32	7.17	0.282	40.3

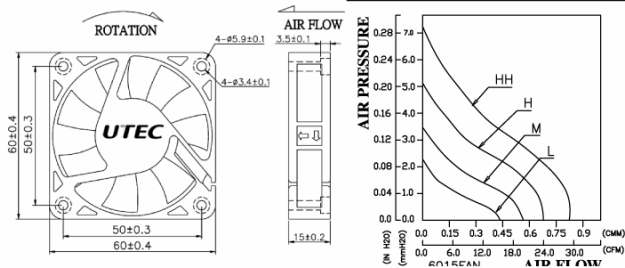

DC Fan

### DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV