


DC Axial Fan

AT6015L Series

60x60x15mm II



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow		Static Pressure		Acoustic Noise (dBA)
						(CMM)	(CFM)	(mm-H ₂ O)	(inch-H ₂ O)	
AT6015L-12LLS/2B/1B/FB	12	9~13.8	0.05	0.60	2200	0.296	10.47	1.24	0.049	20.7
AT6015L-12LS/2B/1B/FB	12	8~13.8	0.10	1.20	3000	0.411	14.50	2.24	0.088	27.1
AT6015L-12MS/2B/1B/FB	12	8~13.8	0.15	1.80	3800	0.521	18.38	3.63	0.143	33.0
AT6015L-12HS/2B/1B/FB	12	8~13.8	0.21	2.52	4600	0.624	22.02	5.01	0.197	38.6
AT6015L-12HHS/2B/1B/FB	12	8~13.8	0.32	3.84	5400	0.739	26.11	6.87	0.270	44.0

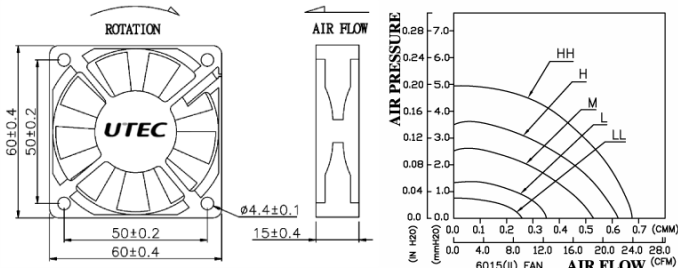

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV