


DC Axial Fan

AT7025L Series

70x70x25mm I



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM)	(CFM)	Static Pressure (mm-H2O)	(inch-H2O)	Acoustic Noise (dBA)
AT7025L-05LS/2B/FB	5	4~5.5	0.19	0.95	2600	0.686	24.23	1.93	0.076	30.8
AT7025L-05MS/2B/FB	5	4~5.5	0.37	1.85	3200	0.826	29.19	2.64	0.104	36.6
AT7025L-05HS/2B/FB-	5	4~5.5	0.59	2.95	3800	0.972	34.32	3.69	0.145	41.5
AT7025L-12LS/2B/FB	12	8~13.8	0.08	0.96	2600	0.686	24.23	1.93	0.076	30.8
AT7025L-12MS/2B/FB	12	8~13.8	0.14	1.68	3200	0.826	29.19	2.64	0.104	36.6
AT7025L-12HS/2B/FB	12	8~13.8	0.23	2.76	3800	0.972	34.32	3.69	0.145	41.5
AT7025L-12HHS/2B/FB-	12	8~13.8	0.39	4.68	4400	1.113	39.31	5.04	0.198	44.8
AT7025L-12TH2B-	12	8~13.8	0.64	7.68	5000	1.244	43.94	7.20	0.283	48.2
AT7025L-12FH2B-	12	8~13.8	0.80	9.60	5600	1.421	50.17	8.51	0.335	51.5
AT7025L-24LS/2B/FB	24	12~27.6	0.06	1.44	2600	0.686	24.23	1.93	0.076	30.8
AT7025L-24MS/2B/FB	24	12~27.6	0.08	1.92	3200	0.826	29.19	2.64	0.104	36.6
AT7025L-24HS/2B/FB	24	12~27.6	0.13	3.12	3800	0.972	34.32	3.69	0.145	41.5
AT7025L-24HHS/2B/FB-	24	12~27.6	0.26	6.24	4400	1.113	39.31	5.04	0.198	44.8
AT7025L-24THS/2B/FB-	24	12~27.6	0.33	7.92	5000	1.244	43.94	7.20	0.283	48.2
AT7025L-24FHS/2B/FB-	24	12~27.6	0.43	10.32	5600	1.421	50.17	8.51	0.335	51.5

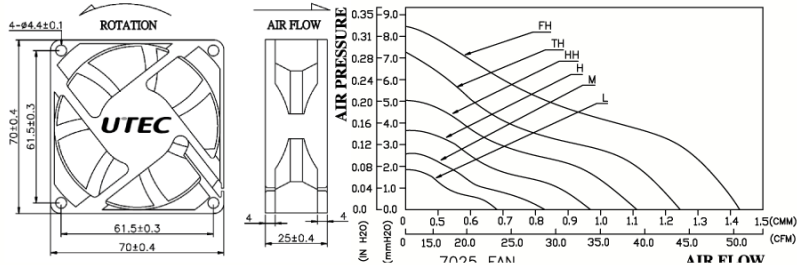

DC Fan

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Rotor and Polarity Protected
- Safety Standards: UL/CUL, TUV