


DC Axial Fan

AT7025L Series

70x70x25mm II



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM) (CFM)	Static Pressure (mm-H2O) (inch-H2O)	Acoustic Noise (dBA)
AT7025L-05LS/2B/FB	5	4~5.5	0.18	0.90	2600	0.615 21.73	2.42 0.095	26.4
AT7025L-05MS/2B/FB	5	4~5.5	0.24	1.20	3200	0.759 26.79	3.59 0.141	33.1
AT7025L-05HS/2B/FB-	5	4~5.5	0.42	2.10	3800	0.936 33.05	4.93 0.194	36.6
AT7025L-12LS/2B/FB	12	8~13.8	0.10	1.20	2600	0.615 21.73	2.42 0.095	26.4
AT7025L-12MS/2B/FB	12	8~13.8	0.12	1.44	3200	0.759 26.79	3.59 0.141	33.1
AT7025L-12HS/2B/FB	12	8~13.8	0.18	2.16	3800	0.936 33.05	4.93 0.194	36.6
AT7025L-12HHS/2B/FB-	12	8~13.8	0.26	3.12	4400	1.099 38.81	6.71 0.264	42.5
AT7025L-12TH2B-	12	8~13.8	0.41	4.92	5000	1.240 43.78	8.16 0.321	45.8
AT7025L-12FH2B-	12	8~13.8	0.70	8.40	5600	1.391 49.14	10.30 0.405	49.2
AT7025L-24LS/2B/FB	24	12~27.6	0.07	1.68	2600	0.615 21.73	2.42 0.095	24.5
AT7025L-24MS/2B/FB	24	12~27.6	0.09	2.16	3200	0.759 26.79	3.59 0.141	32.2
AT7025L-24HS/2B/FB	24	12~27.6	0.15	3.60	3800	0.936 33.05	4.93 0.194	36.7
AT7025L-24HHS/2B/FB-	24	12~27.6	0.21	5.04	4400	1.099 38.81	6.71 0.264	41.4
AT7025L-24TH2B-	24	12~27.6	0.30	7.20	5000	1.240 43.78	8.16 0.321	43.6
AT7025L-24FH2B-	24	12~27.6	0.40	9.60	5600	1.391 49.14	10.30 0.405	49.2

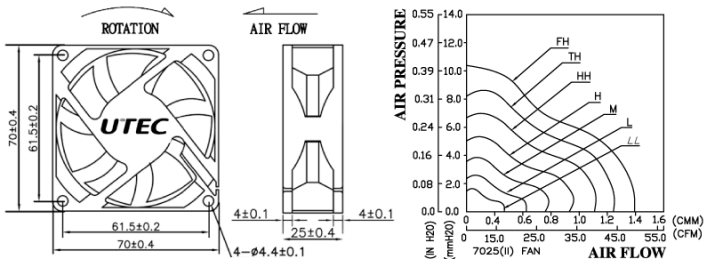

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV