


DC Axial Fan

AT7025L Series

70x70x25mm III



| Model | Rated Voltage (VDC) | Operating Voltage (VDC) | Rated Current (AMP) | Power Consumption (WATTS) | Speed Reference (RPM) | AirFlow (CMM) (CFM) | | Static Pressure (mm-H2O) (inch-H2O) | | Acoustic Noise (dBA) |
|-----------------|---------------------|-------------------------|---------------------|---------------------------|-----------------------|---------------------|-------|-------------------------------------|-------|----------------------|
| AT7025L-05L2B | 5 | 4~5.5 | 0.21 | 1.05 | 2600 | 0.791 | 27.92 | 3.02 | 0.119 | 33.3 |
| AT7025L-05M2B- | 5 | 4~5.5 | 0.37 | 1.85 | 3200 | 0.969 | 34.23 | 4.58 | 0.180 | 39.1 |
| AT7025L-05H2B- | 5 | 4~5.5 | 0.57 | 2.85 | 3800 | 1.088 | 38.43 | 6.43 | 0.253 | 43.0 |
| AT7025L-12L2B | 12 | 8~13.8 | 0.11 | 1.32 | 2600 | 0.791 | 27.92 | 3.02 | 0.119 | 33.3 |
| AT7025L-12M2B | 12 | 8~13.8 | 0.14 | 1.68 | 3200 | 0.969 | 34.23 | 4.58 | 0.180 | 39.1 |
| AT7025L-12H2B | 12 | 8~13.8 | 0.20 | 2.40 | 3800 | 1.088 | 38.43 | 6.43 | 0.253 | 43.0 |
| AT7025L-12HH2B- | 12 | 8~13.8 | 0.31 | 3.72 | 4400 | 1.244 | 43.92 | 8.78 | 0.346 | 47.5 |
| AT7025L-12TH2B- | 12 | 8~13.8 | 0.51 | 6.12 | 5000 | 1.507 | 53.24 | 10.68 | 0.421 | 51.6 |
| AT7025L-12FH2B- | 12 | 8~13.8 | 0.58 | 6.96 | 5600 | 1.658 | 58.54 | 13.95 | 0.549 | 54.3 |
| AT7025L-24L2B | 24 | 12~27.6 | 0.08 | 1.92 | 2600 | 0.791 | 27.92 | 3.02 | 0.119 | 33.3 |
| AT7025L-24M2B | 24 | 12~27.6 | 0.11 | 2.64 | 3200 | 0.969 | 34.23 | 4.58 | 0.180 | 39.1 |
| AT7025L-24H2B | 24 | 12~27.6 | 0.15 | 3.60 | 3800 | 1.088 | 38.43 | 6.43 | 0.253 | 43.0 |
| AT7025L-24HH2B- | 24 | 12~27.6 | 0.20 | 4.80 | 4400 | 1.244 | 43.92 | 8.78 | 0.346 | 47.5 |
| AT7025L-24TH2B- | 24 | 12~27.6 | 0.26 | 6.24 | 5000 | 1.507 | 53.24 | 10.68 | 0.421 | 51.6 |
| AT7025L-24FH2B- | 24 | 12~27.6 | 0.33 | 7.92 | 5600 | 1.658 | 58.54 | 13.95 | 0.549 | 54.3 |

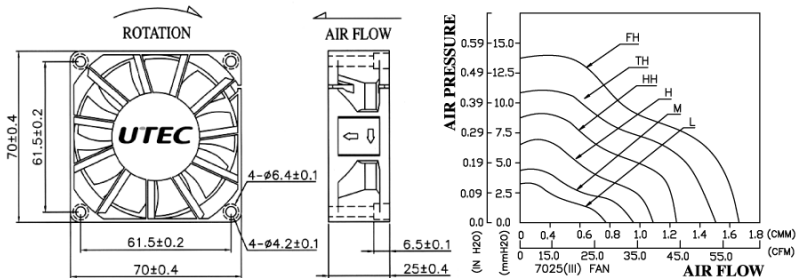

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Rotor and Polarity Protected
- Safety Standards: UL/CUL, TUV