


DC Axial Fan

AT8015L Series

80x80x15mm



| Model | Rated Voltage (VDC) | Operating Voltage (VDC) | Rated Current (AMP) | Power Consumption (WATTS) | Speed Reference (RPM) | AirFlow (CMM) | (CFM) | Static Pressure (mm-H ₂ O) | (Inch-H ₂ O) | Acoustic Noise (dBA) |
|--------------------------|---------------------|-------------------------|---------------------|---------------------------|-----------------------|---------------|-------|---------------------------------------|-------------------------|----------------------|
| AT8015L-12LS/2B/1B/FB(-) | 12 | 8~13.8 | 0.11 | 1.32 | 2500 | 0.829 | 29.29 | 2.86 | 0.113 | 31.4 |
| AT8015L-12MS/2B/1B/FB(-) | 12 | 6~13.8 | 0.16 | 1.92 | 3000 | 0.995 | 35.15 | 4.16 | 0.164 | 36.9 |
| AT8015L-12HS/2B/1B/FB(-) | 12 | 6~13.8 | 0.27 | 3.24 | 3500 | 1.135 | 40.08 | 5.52 | 0.217 | 41.6 |
| AT8015L-12HHS/2B/1B/FB- | 12 | 6~13.8 | 0.38 | 4.56 | 4000 | 1.326 | 46.81 | 7.31 | 0.288 | 44.1 |
| AT8015L-12TH2B/1B- | 12 | 6~13.8 | 0.58 | 6.96 | 4500 | 1.538 | 54.30 | 8.86 | 0.349 | 47.2 |
| AT8015L-24LS/2B/1B/FB(-) | 24 | 18~27.6 | 0.09 | 2.16 | 2500 | 0.829 | 29.29 | 2.86 | 0.113 | 31.4 |
| AT8015L-24MS/2B/1B/FB(-) | 24 | 12-27.6 | 0.14 | 3.36 | 3000 | 0.995 | 35.15 | 4.16 | 0.164 | 36.9 |
| AT8015L-24HS/2B/1B/FB- | 24 | 12-27.6 | 0.18 | 4.32 | 3500 | 1.135 | 40.08 | 5.52 | 0.217 | 41.6 |
| AT8015L-24HHS/2B/1B/FB- | 24 | 12-27.6 | 0.21 | 5.04 | 4000 | 1.326 | 46.81 | 7.31 | 0.288 | 44.1 |
| AT8015L-24THS/2B/1B/FB- | 24 | 12-27.6 | 0.37 | 8.88 | 4500 | 1.538 | 54.30 | 8.86 | 0.349 | 47.2 |

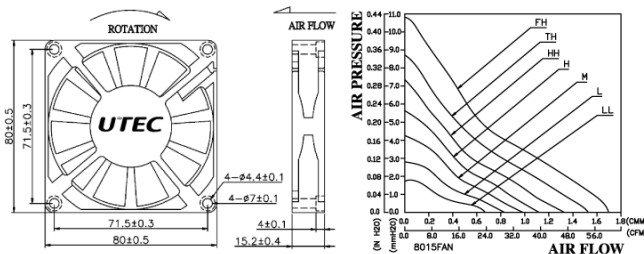

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV