


DC Axial Fan

AT8015L Series

80x80x15.3mm II



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow		Static Pressure		Acoustic Noise (dBA)
						(CMM)	(CFM)	(mm-H ₂ O)	(Inch-H ₂ O)	
AT8015L-12LS/2B/1B/FB(-)	12	6~13.8	0.10	1.20	2000	0.836	29.54	1.73	0.068	25.4
AT8015L-12MS/2B/1B/FB(-)	12	6~13.8	0.19	2.28	2500	1.049	37.04	2.68	0.106	32.2
AT8015L-12HS/2B/1B/FB(-)	12	6~13.8	0.26	3.12	3000	1.201	42.42	3.93	0.155	36.1
AT8015L-12HHS/2B/1B/FB(-)	12	6~13.8	0.43	5.16	3300	1.324	46.75	4.95	0.195	41.1
AT8015L-24LS/2B/1B/FB(-)	24	12~27.6	0.10	2.40	2000	0.836	29.54	1.73	0.068	25.4
AT8015L-24MS/2B/1B/FB(-)	24	12~27.6	0.12	2.88	2500	1.070	37.80	2.75	0.108	32.2
AT8015L-24HS/2B/1B/FB(-)	24	12~27.6	0.15	3.60	3000	1.201	42.42	3.93	0.155	36.1
AT8015L-24HHS/2B/1B/FB(-)	24	12~27.6	0.26	6.24	3300	1.324	46.75	4.95	0.195	41.1

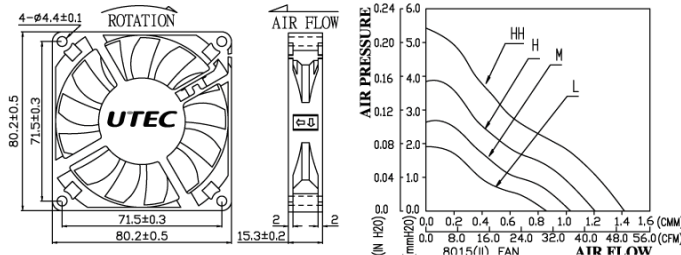

DC Fan

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Roter and Polarity Protected
- Safety Standards: UL/CUL, TUV