



DC Axial Fan

AT9225L Series

92x92x25mm III



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow		Static Pressure (mm-H ₂ O) (inch-H ₂ O)		Acoustic Noise (dBA)
						(CMM)	(CFM)			
AT9225L-12LS/2B/FB(-)	12	8~13.8	0.12	1.44	2400	1.401	49.48	2.92	0.115	33.0
AT9225L-12MS/2B/FB(-)	12	8~13.8	0.20	2.40	2800	1.598	56.43	3.89	0.153	37.5
AT9225L-12HS/2B/FB(-)	12	8~13.8	0.24	2.88	3200	1.819	64.24	5.03	0.198	40.9
AT9225L-12HH2B-	12	8~13.8	0.39	4.68	3600	2.105	74.34	6.15	0.242	44.9
AT9225L-12TH2B-	12	8~13.8	0.45	5.40	4000	2.336	82.49	7.86	0.309	47.1
AT9225L-12FH2B-	12	8~13.8	0.60	7.20	4400	2.537	89.60	8.74	0.344	50.5
AT9225L-24LS/2B/FB(-)	24	12~27.6	0.08	1.92	2400	1.401	49.48	2.92	0.115	33.0
AT9225L-24MS/2B/FB(-)	24	12~27.6	0.11	2.64	2800	1.598	56.43	3.89	0.153	37.5
AT9225L-24HS/2B/FB	24	12~27.6	0.18	4.32	3200	1.819	64.24	5.03	0.198	40.9
AT9225L-24HS/2B/FB-	24	12~27.6	0.18	4.32	3200	1.819	64.24	5.03	0.198	40.9
AT9225L-24HH2B-	24	12~27.6	0.22	5.28	3600	2.105	74.34	6.15	0.242	44.9
AT9225L-24TH2B-	24	12~27.6	0.31	7.44	4000	2.336	82.49	7.86	0.309	47.1

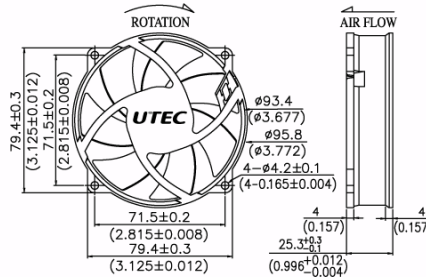

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Rotor and Polarity Protected
- Safety Standards: UL/CUL, TUV