



DC Axial Fan

AT9238L Series

92x92x38mm



Model	Rated Voltage (VDC)	Operating Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	AirFlow (CMM)	AirFlow (CFM)	Static Pressure (mm-H2O)	Static Pressure (inch-H2O)	Acoustic Noise (dBA)
AT9238L-12L2B-	12	8~13.8	0.19	2.28	2600	1.882	66.46	4.88	0.192	39.9
AT9238L-12M2B-	12	8~13.8	0.30	3.60	3200	2.245	79.29	7.10	0.280	45.6
AT9238L-12H2B-	12	8~13.8	0.49	5.88	3800	2.513	88.73	9.77	0.385	49.9
AT9238L-12HH2B-	12	8~13.8	0.61	7.32	4400	3.030	107.01	12.40	0.488	54.3
AT9238L-12TH2B-	12	8~13.8	0.89	10.68	5000	3.549	125.34	14.42	0.568	57.9
AT9238L-24L2B-	24	18~27.6	0.12	2.88	2600	1.882	66.46	4.88	0.192	39.9
AT9238L-24M2B-	24	18~27.6	0.20	4.80	3200	2.245	79.29	7.10	0.280	45.6
AT9238L-24H2B-	24	18~27.6	0.27	6.48	3800	2.513	88.73	9.77	0.385	49.9
AT9238L-24HH2B-	24	18~27.6	0.31	7.44	4400	3.030	107.01	12.40	0.488	54.3
AT9238L-24TH2B-	24	18~27.6	0.48	11.52	5000	3.549	125.34	14.42	0.568	57.9
AT9238L-48L2B-	48	38~52.8	0.06	2.88	2600	1.882	66.46	4.88	0.192	39.9
AT9238L-48M2B-	48	38~52.8	0.09	4.32	3200	2.245	79.29	7.10	0.280	45.6
AT9238L-48H2B-	48	38~52.8	0.15	7.20	3800	2.513	88.73	9.77	0.385	49.9
AT9238L-48HH2B-	48	38~52.8	0.29	13.92	4400	3.030	107.01	12.40	0.488	54.3
AT9238L-48TH2B-	48	38~52.8	0.24	11.52	5000	3.549	125.34	14.42	0.568	57.9

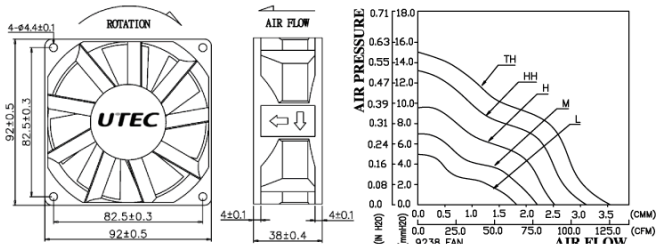

DC Fan

DC FAN

- Frame & Impeller: Plastic (UL94V-0)
- Bearing: Dual Ball Bearing
- Basic Locked Rotor and Polarity Protected
- Safety Standards: UL/CUL, TUV